


Technical data and dimensions

Type	AeroTec		
Operating Voltage (V)	1 ~ 230 – 240		
Frequency (Hz)	50 – 60		
Maximum switching current (250V AC at cos φ =1)	5		
Battery type	1 x CR 2032		
Ingress protection (IP)	20		
Protection class (only after correct installation)	II		
Type of installation	Flush mount: Requires at least Ø 58 mm flush mount box, 35 mm deep Surface mount: possible in suitable surface mount box		
ProLine frame included	–	–	• (set)
Colours	white	ivory	white
Item Number	28 141.0001	28 141.0011	28 140.0001



Accessories

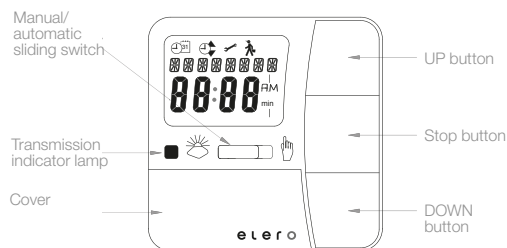

RevoLine
Type 9 + 11
Venetian blind drives
Speciality drives
Hausautomation, radio controls, radio sensors
Hardwired control units
Door drives
Door controls
Adapter profiles
Lifting capacity tables