

Technical data and dimensions

Type	AstroTec-868	AstroTec-868 bidi
Operating Voltage (V DC)	3	
Battery type	2 x LR 03 (AAA)	
Ingress protection (IP)	20	
Temperature range (°C)	0 to +55	
Radio frequency (MHz)	868	
Dimensions (mm)	L 85 x W 85 x T 28	
Type of installation	Wall-mounted	
Unidirectional	•	-
Bidirectional	-	•
There are different regulations for the USA, Canada, Australia and some countries in South America.	915	
Accessories included	Batteries, wall bracket, 2 wall plugs (Ø 6 mm), 2 screws (Spax 4 x 35)	
Colours	white	



Item Number	28 320.0001	28 320.0006
-------------	-------------	-------------

Lumo 2.0 m (P. 240)	•	•
---------------------	---	---

Item Number
28 080.0001

Lumo 10.0 m (P. 240)	•	•
----------------------	---	---

Item Number
28 090.0001

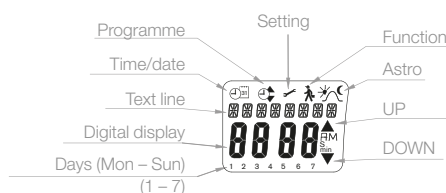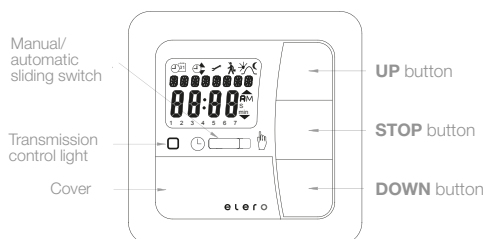

Accessories



Lumo
Light and
twilight sensor
Page 240