




Technical data and dimensions





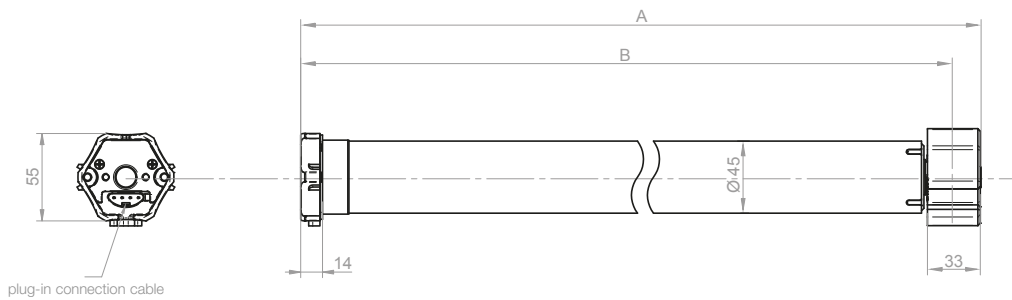


Type	RolTop M6	RolTop M7/23	RolTop M10	RolTop M12/23	RolTop M20	RolTop M30	RolTop M40	RolTop M50
Operating Voltage (V)	1 ~ 230	1 ~ 230 – 240				1 ~ 230		
Frequency (Hz)	50							
Noiseless soft brake				•		–		
Fast-running version	–	•	–	•	–			
Max. torque (Nm)	6	7	10	12	20	30	40	50
Speed (rpm)	14	23	14	23	14			
Current (A)	0.52	0.6		0.9		1.2	1.3	
Power (W)	118	140		200		270	300	
Shaft Ø (mm)				50				
Ingress protection (IP)				44				
Max. limit switch range in Revolutions of the shaft	40							
Operating mode (KB in min.)	5			4		5	4	
Length A (mm)	478	480		530	540	530	540	560
Length B (mm)	460	462		513	523	512	522	542
Weight (kg)	1.5	1.9		2.2		2.3	2.6	3.1
Temperature range (°C)	–20 to +60							
Conformity	CE		CE  					
Connecting cable pluggable (m)	2.0							

Item Number	34 301.0001	34 225.0001	34 221.0001	34 235.0001	34 231.0001	34 241.0001	34 251.0001	34 261.0001
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------

All drives are exclusive of: drive adapter, wall bracket (motor bearing) and switches.



Accessories

-  Cables
Page 92
-  Drive adapter sets
Page 93
-  Brackets
Page 94
-  ProLine control units
from page 216
-  Sensors
from page 240
-  Rigid shaft fastener
Page 96
-  Radio receivers
from page 192