


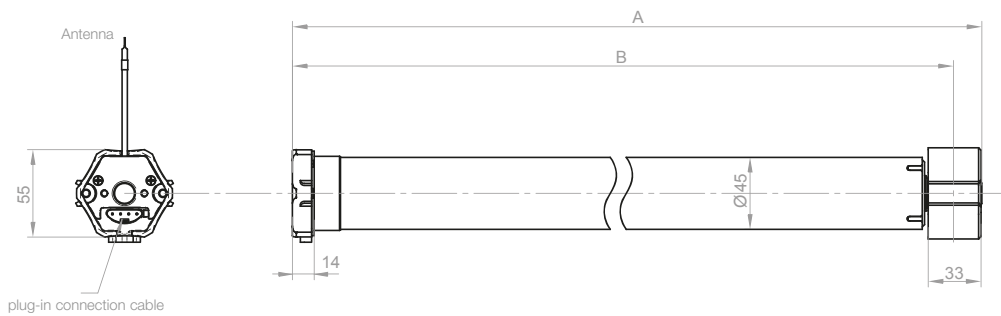


Technical data and dimensions







Type	RoTop Sonro M10-868	RoTop Sonro M20-868
Operating Voltage (V)	1 ~ 230	
Frequency (Hz)	50	
Noiseless soft brake	•	
Max. torque (Nm)	10	20
Speed (rpm)	14	
Current (A)	0.6	0.9
Power (W)	140	200
Shaft Ø (mm)	50	
Ingress protection (IP)	44	
Max. limit switch range in Revolutions of the shaft	40	
Operating mode (KB in min.)	5	4
Length A (mm)	480	540
Length B (mm)	462	523
Weight (kg)	1.9	2.2
Temperature range (°C)	-20 to +60	
Conformity	  	
Connecting cable pluggable (m)	2.0	

Item Number	34 222.5606	34 232.5606
-------------	-------------	-------------

All drives are exclusive of: drive adapter, wall bracket (motor bearing) and switches.



Accessories

-  Cables Page 92
-  Drive adapter sets Page 93
-  Brackets Page 94
-  Radio control units from page 176
-  Radio sensors from page 204
-  Rigid shaft fastener Page 96

Revoline M
Type 9 + 11
Venetian blind drives
Speciality drives
Hausautomation, radio controls, radio sensors
Hardwired controls sensors
Door drives
Door controls
Adapter profiles Lifting capacity tables