


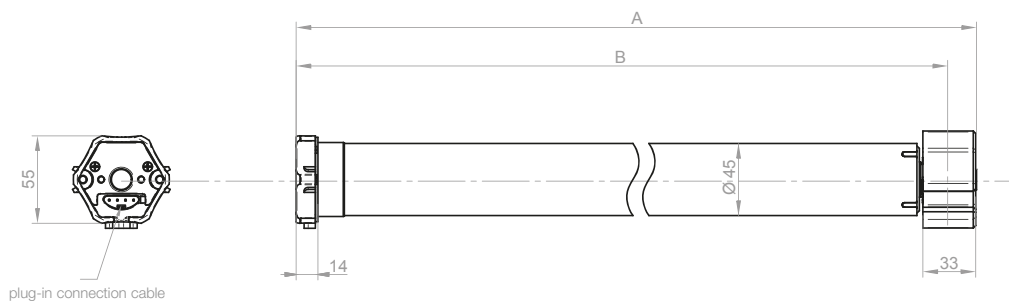


Technical data and dimensions


Type	VariEco M7/23	VariEco M10	VariEco M12/23	VariEco M20	VariEco M30	VariEco M40	VariEco M50
Operating Voltage (V)	1 ~ 230						
Frequency (Hz)	50						
Noiseless soft brake	•			-			
Fast-running version	•	-	•	-			
Max. torque (Nm)	7	10	12	20	30	40	50
Speed (rpm)	23	14	23	14			
Current (A)	0.6		0.9		1.2		1.3
Power (W)	140		200		270		300
Shaft Ø (mm)	50						
Ingress protection (IP)	44						
Max. limit switch range in Revolutions of the shaft	35						
Operating mode (KB in min.)	5		4		5		4
Length A (mm)	491		552		541	571	
Length B (mm)	474		534		524		554
Weight (kg)	1.9		2.2		2.3	2.6	3.1
Temperature range (°C)	-20 to +60						
Conformity	  						
Connecting cable pluggable (m)	2.0						


Item Number	34 925.0101	34 921.0101	34 935.0101	34 931.0101	34 941.0101	34 951.0101	34 961.0101
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------


All drives are exclusive of: drive adapter, wall bracket (motor bearing) and switches.





Accessories


- 


Cables
Page 92
- 


Drive adapter sets
Page 93
- 

Brackets
Page 94
- 

Adjustment aid
Page 92
- 

ProLine control units
from page 216
- 

Sensors
from page 240
- 

Rigid shaft fastener
Page 96
- 

Radio receivers
from page 192