

Technical data and dimensions


| Type | AstroTec | | | TempoTec | | | AstroClic |
|--|---|-------|---------|----------|-------|---------|------------------|
| Operating Voltage (V) | 1 ~ 230 – 240 | | | | | | |
| Frequency (Hz) | 50 – 60 | | | | | | |
| Maximum switching current (A) (250V AC at cos φ =1) | 5 | | | | | | |
| Ingress protection (IP) | 20 | | | | | | |
| Protection class (only after correct installation) | II | | | | | | |
| Temperature range (°C) | 0 to +55 | | | | | | |
| Radio frequency (MHz) | 868 | | | | | | |
| ProLine frame included | - | - | • (set) | - | - | • (set) | - |
| Type of installation | Flush mount: Requires at least Ø 58 mm flush mount box, 35 mm deep Surface mount: possible in suitable surface mount box | | | | | | Strap coiler box |
| Colours | white | ivory | white | white | ivory | white | white |

| Item Number | 28 061.0001 | 28 061.0011 | 28 060.0001 | 28 041.0001 | 28 041.0011 | 28 040.0001 | 28 881.0001 |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|

- TempoTec operating unit white**
- Item Number
28 041.2001
- UniClic-frame white
(with integrated mains unit)**
- Item Number
28 880.0001



TempoTec operating unit UniClic frame

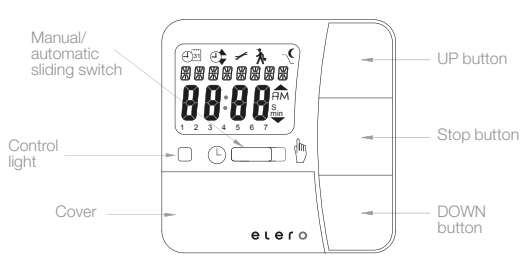

Accessories

- Frame adapters
Page 228
- Flash mount frames
Page 229
- Lumo Light and twilight sensor
Page 240
- Flash mount housings
Page 229
- Surface mount housings
Page 229

RevoLine
Type 9 + 11
Venetian blind drives
Speciality drives
Hausautomation, radio controls, radio sensors
Hardwired control units
Door drives
Door controls
Adapter profiles
Lifting capacity tables